


JUNG DIMMER

BEFORE attempting to carry out any electrical work **ALWAYS** isolate the mains supply by switching off at the main consumer board. **CONFIRM** that the part you intend to work on is indeed disconnected from the mains supply by means of a multimeter or similar testing device.


These instructions are purely to aid the proper fitting of the mechanical parts of the switch. Consult your electrician or wiring regulations for guidance on how to correctly wire 2-way or intermediate switches. A basic diagram from the manufacturer is included in the product packaging.



Fit the back box as shown and remove the top device screw, if necessary for your exact dimmer unit. Some have runners, some don't.
(If you have a standard square back box, just follow the same instructions from here on!)

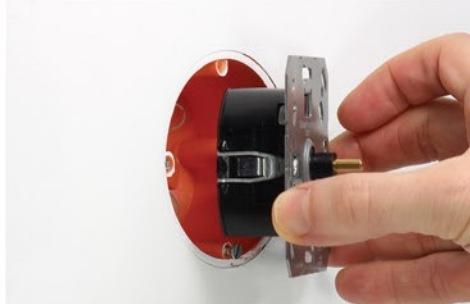

Align the insert with the device screws and make sure they fit neatly into the runners of the insert. (On a standard square box the device screws are usually fixed on the sides, not top and bottom.)

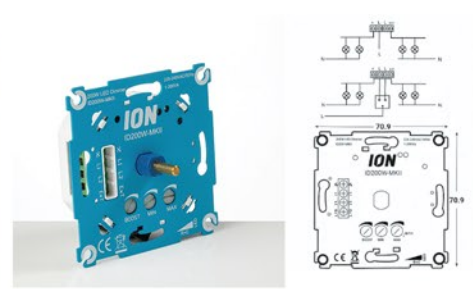

Connect the insert to the existing wiring according to the type of switch, and to local wiring regulations. Your electrician will be able to identify the relevant connectors.
NB: Unit in picture for illustration only; it may not be exactly your product!



Once the wires are connected, place the insert in the back box, using the runners to straighten it. Secure the insert by tightening the device screws with a flat-head screwdriver.



The frame is placed loosely over the insert. On some models there is a particular rotation that makes the frame slot into place.



Hold the frame in place and put the front plate on top of the insert. Use this step to ensure that the frame is straight, optionally by using a spirit level. If not, go back 2 steps and make adjustments to the insert.



Fix the front plate onto the dimmer spindle with the small metal nut supplied with the dimmer unit. Please do not overtighten the nut - you could crack the spacer or plate!



Finally just push the rotary handle onto the spindle. The dimmer has a push on/off function, as well as the rotating dimming function.

PLEASE NOTE: SWTCH SELLS WIRING ACCESSORIES. WE ARE NOT QUALIFIED TO GIVE ELECTRICAL ADVICE OR CONSULTATION, BUT WE WILL ALWAYS TRY TO HELP YOU OR YOUR ELECTRICIAN. ELECTRICAL WORK SHOULD BE UNDERTAKEN BY A QUALIFIED INSTALLER OR OTHERWISE COMPETENT PERSON.